

## Slickline Retrievable Firing Device

The 1 11/16" Slickline Retrievable Firing Device (SRFD) is designed for use with all Expro gun systems ranging in size from 19/16" through 7"

The SRFD is used where a low pressure firing system is required, which may normally be affected by previous pressure test operations. The Firing Head is run on Slickline and attached to the TCP string just prior to firing. It can also be retrieved on Slickline.

The SRFD is run on a standard Jar Down running tool.

The device is available with either no delay fuse, or with modular fuse sections of 10, 20, 30 and 60 minutes delay.


### Features and benefits

- Allows gun system to be run without any firing head installed
- Can also be run in tandem with a Top Dual delay Firing Device
- Allows retrieval and reinstallation of firing system without the need to retrieve the gun string
- Reduces the required applied surface pressure to activate

### Specifications:

Length			
10-min	28.3" (0.72 m)		26.50" (0.67 m)
20-min	43.0" (1.09 m)		41.19" (1.05 m)
30-min	57.7" (1.47 m)		55.88" (1.42 m)
Diameter			
	1.69" (43 mm)		1.69" (43 mm)
Pressure Rating			
Collapse	20,000 PSI		0,000 PSI
Differential	15,000 PSI		N/A
Seal Rating			
	10,000 PSI standard		10,000 PSI standard
	20,000 PSI high-temp.		20,000 PSI high-temp.
Tensile Strength			
	70,000 lbs.*		70,000 lbs.*

\* When used on guns 2 1/2" and larger, the tensile load is carried by the 2 3/8" or 2 7/8" API tubing sub that houses the assembly.

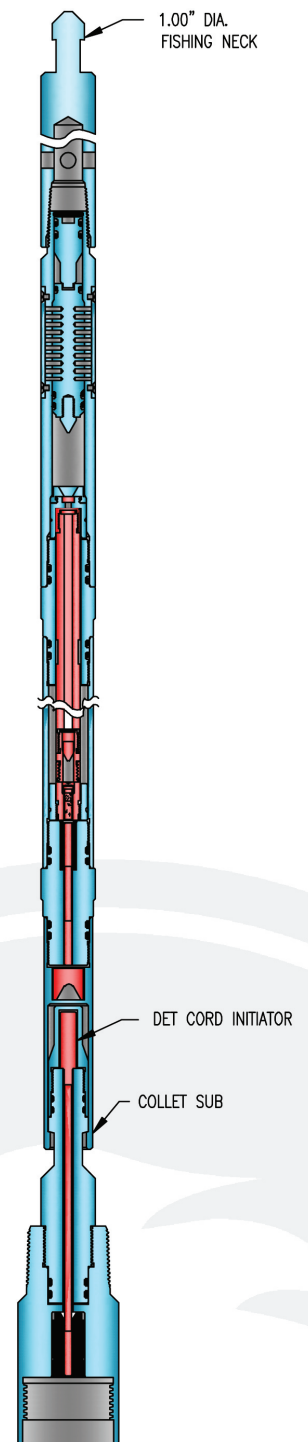

© Expro International Group LTD  
SlicklineRetrievableFiringDevice  
100611\_v1